

AD-A143 128

# NAVAL POSTGRADUATE SCHOOL

## Monterey, California



DTIC  
ELECTE  
JUL 17 1984

MEASUREMENT OF LINAC  
BUNCH PARAMETERS USING THE  
CERENKOV EFFECT

Fred R. Buskirk  
and  
John R. Neighbours

May 1984

Technical Report

DTIC FILE COPY

Approved for public release; distribution unlimited

Prepared for:  
Chief of Naval Research, Arlington, VA 22217

84 07 16 083

NAVAL POSTGRADUATE SCHOOL  
Monterey, California

Commodore R. H. Shumaker  
Superintendent

David Schraday  
Provost

The work reported herein was supported by the Chief  
of Naval Research.

Reproduction of all or part of this report is authorized.

This report was prepared by:

*Fred R Buskirk*

F. R. Buskirk  
Professor of Physics

*John R Neighbours*

J. R. Neighbours  
Professor of Physics

Reviewed by:

Released by:

*G. E. Schacher*  
G. E. Schacher, Chairman  
Department of Physics

*J. N. Dyck*  
J. N. Dyck  
Dean of Science and Engineering

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NPS-61-84-008	2. GOVT ACCESSION NO. AD-A143128	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Measurement of LINAC Bunch Parameters using the Cerenkov effect.		5. TYPE OF REPORT & PERIOD COVERED Technical Report
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) F. R. Buskirk and J. R. Neighbours		8. CONTRACT OR GRANT NUMBER(s) 61152N; RR000-01-10 N0001484WR41001
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Postgraduate School Monterey California 93943		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Postgraduate School Monterey, California 93943		12. REPORT DATE 1984
		13. NUMBER OF PAGES
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Chief of Naval Research Arlington, VA 22217		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Electron beam monitors Electron beam diagnostics Radiation from electron beam		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE  
S/N 0102-LF-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

## MEASUREMENT OF LINAC BUNCH PARAMETERS USING THE CERENKOV EFFECT

F. R. Buskirk and J. R. Neighbours

Naval Postgraduate School

Department of Physics

Monterey, CA 93943

## ABSTRACT

- High energy electrons above about 25 MeV may produce microwave radiation in air by the Cerenkov mechanism. Electrons accelerated by a travelling wave accelerator are emitted in bunches. The radiation produced by such a beam in air should consist of the basic accelerator frequency and many harmonics. Here it is explored how the microwave harmonics may be used to determine the spatial structure of the bunches.

Accession For  
NTIS CASE  
REF ID:  
10-10-69

DTIC  
COPY  
INSPECTED  
1

10-10-69  
AV 10-10-69  
MILITARY

A1

## INTRODUCTION

In a previous publication, an investigation was made of radiation produced by electrons moving at a velocity  $v$  faster than  $c$ , the radiation velocity in a medium (Cerenkov radiation). In particular, the electrons were considered to be emitted in periodic bunches, as would be found in a linac beam. At microwave frequencies, the electrons in the bunch radiate coherently, but as the wave length decreases relative to the bunch size, the intensity decreases relative to what would be expected for a small bunch having the same charge. References 1 and 2 contain the basic equations which are developed further here.

Equations (33) and A17 from the earlier paper describe the energy loss per unit path length per bunch,  $\frac{dE}{dx}$ . For periodic bunches:

$$\frac{dE(\omega)}{dx} = \frac{\mu}{4\pi} \omega \omega_0 \sin^2 \theta_c q^2 F^2(\vec{k}) \quad (1)$$

Here,  $\omega_0$  is the linac angular frequency, the radiation is emitted at a harmonic  $\omega$  of  $\omega_0$ ,  $\theta_c$  is the Cerenkov angle, where  $\cos \theta_c = \frac{c}{v}$ ,  $q$  is the total charge in the bunch, and  $F(\vec{k})$  is the form factor of the charge distribution  $\rho_0'(\vec{r})$  for a bunch.

$$F(\vec{k}) = \frac{1}{q} \iiint e^{i\vec{k} \cdot \vec{r}} \rho_0'(\vec{r}) d^3r \quad (2)$$

The vector  $\vec{k}$  is the propagation vector for the emitted wave. In the case of a single bunch, the frequency distribution is continuous and we have for the radiation emitted in a range  $d\omega$

$$\frac{dE}{dx} = \frac{\mu}{4\pi} \omega d\omega \sin^2 \theta_c q^2 F^2(\vec{k}) \quad (3)$$

It was also noted in the earlier paper that if the emission region is of finite length, the radiation is emitted in a range of angle about the Cerenkov angle  $\theta_c$ , but in the following considerations, those effects are neglected.

We consider here a more detailed investigation of the form factor  $F(\vec{k})$  and how radiation intensity may be used to infer properties of the bunch.

The electrons in the accelerator have slightly different energies, depending on the phase angle  $\psi$  of the electron relative to the wave traveling down the accelerator. Fig. (1) shows the energy of representative electrons, and a magnetic deflection and slit system at the end of the accelerator passes a limited range of energies  $\Delta E$ , so that the phase is limited to  $\pm \Delta\psi$  about  $\psi = 0$ . See Appendix A for details. If the electrons were uniformly distributed in phase, the output pulse charge density would be a series of square pulses, separated by a distance  $x = v 2\pi/\omega_0$  and of length  $x' = x 2\Delta\psi/2\pi$ , as shown in Fig. (2a). Fig. (2b) shows possible gaussian bunches.

#### CALCULATIONS FOR SPECIFIC BUNCH DISTRIBUTION

The theory, namely Equations (1) and (2), make it tempting to attempt measurements to determine the charge distribution function by means of experimental measurements. In the ideal situation, sufficient measurements of power at many frequencies would determine the fourier transform of the charge bunch, which could be inverted to give the spatial charge density  $\rho(\vec{r})$ .

Calculations of  $P(\omega)$ , the power radiated (proportional to  $dE/dx$  from Equation (1)) were performed for various assumed charge distributions.  $P(\omega)$  is plotted for a uniform bunch (Figure 3), a cosine bunch (Figure 4), a Gaussian bunch (Figure 5) and a rather artificial hollow spherical shell (Figure 6). All of the  $P(\omega)$  curves show slight differences; in particular the Gaussian has no nulls as expected, and the hollow shell has many nulls and very strong high frequencies. However, the possibility to distinguish between charge distributions is very limited. All of the distributions have a parameter determining the spatial range, the parameter  $b$  in the Gaussian  $\exp(-r^2/b^2)$ , and  $k$  in the cosine function  $\cos kr$ . The values of such parameters can be suitably chosen so that the lowest power peak in Figures 3 to 6 are very similar.

We conclude that experimentally, it would be hard to distinguish between different functions, but that it would be possible to determine a range parameter rather accurately.

#### REFERENCES

1. F. R. Buskirk and J. R. Neighbours, Phys. Rev. A 28, 1531 (1983).
2. J. R. Neighbours and F. R. Buskirk (To be published in Phys. Rev. A 29, June (1984)).



# ACKNOWLEDGEMENT

This work was supported by the Office of Naval Research.

## Appendix A

### TEMPORAL STRUCTURE OF THE ELECTRON PULSE FROM A TRAVELING WAVE ACCELERATOR.

Assume that the energy of a single electron emerging from a linac with phase  $\psi$  relative to the traveling wave field is

$$E = E_0 \cos \psi \quad (A1)$$

This relation is shown on Fig. 3, along with some dots representing electrons near the maximum energy  $E_0$ , with phases clustered about  $\psi = 0$  and  $\psi = 2\pi$ . Two bunches, separated by a phase difference of  $2\pi$ , are separated by a time  $T_1 = 1/f_0$  where  $f_0$  is the accelerator frequency, which is  $f_0 = 2.85 \times 10^9$  Hz for a typical S-band accelerator of the Stanford type.

If a deflection system with energy resolution slit passes only energies  $E$  from  $E_0$  to  $E_0 - E$  the corresponding range of phase  $\Delta\psi$  is

$$\Delta E = E - E_0 = E_0 (1 - \cos\Delta\psi) \quad (A2)$$

For  $\Delta\psi$  small, this reduces to

$$\frac{\Delta E}{E_0} = \frac{(\Delta\psi)^2}{2} \quad (A3)$$

The temporal pulse length  $T_2$  is

$$T_2 = 2\Delta\psi T_1 / 2\pi \quad (A4)$$

or

$$T_2 = T_1 \cdot 2\Delta\psi / 2\pi$$

If C3 is used to evaluate  $\Delta\psi$  in terms of the fractional energy resolution  $\Delta E/E_0$ ,

$$T_2 = T_1 \left( \frac{2\Delta E}{E_0} \right)^{1/2} \frac{1}{\pi} \quad (A5)$$

For 1% energy resolution,  $T_2/T_1$  is about 1/20. The electrons thus emerge in short bunches, and the charge and current, when expressed in a fourier expansion, should have very strong harmonic content up to and above the 20th harmonic.

## Appendix B

### FORM FACTORS

This section provides details and examples of form factors for various charge distributions. From the main text,  $F$  differs only from  $\rho'$ , the fourier transform of  $\rho$ , by the total charge  $q$  of the bunch, so that for  $\vec{k} = 0$ ,  $F$  reduces to unity. Thus we define

$$F(\vec{k}) = \frac{1}{q} \iiint d^3r \rho(\vec{r}) e^{i\vec{k} \cdot \vec{r}} \quad (B1)$$

For spherically symmetric charge distributions, let  $\vec{k} \cdot \vec{r} = kru$  where  $u$  is the cosine of the angle between  $\vec{k}$  and  $\vec{r}$ . In spherical coordinates,  $d^3r = d\phi du r^2 dr$ . Then we find,

$$F(k) = \frac{1}{q} \frac{4\pi}{k} \int_0^\infty dr r \rho(r) \sin kr \quad (B2)$$

For  $k$  very small,  $\sin x$  may be replaced by  $x - x^3/6$  and we have

$$F(k) = \frac{1}{q} \frac{4\pi}{k} \int_0^\infty dr r \rho(r) [kr - k^3 r^3/6] \quad (B3)$$

Then the two terms in the square bracket lead to separate integrals, the first term being unity and the second is similar to the integral used to calculate the mean square radius,  $\langle r^2 \rangle$ , except for a factor  $k^2/6$ . Thus we have

$$F(k) = 1 - k^2 \langle r^2 \rangle / 6 \quad (B4)$$

For a uniform spherical charge distribution of radius  $R$  well as a spherical shell of radius  $k$ , the integral of (B2) performed easily

$$F(k) = \frac{3}{(kR)^3} (\sin kR - kR \cos kR) \quad (\text{Solid sphere}) \quad ($$

$$F(k) = \frac{1}{kR} \sin(kR) \quad (\text{Spherical shell}) \quad ($$

For a line charge concentrated on the  $z$  axis, we may re (B1) and let  $\rho(r) = \delta(x) \delta(y) \rho''(z)$ , so that

$$F(k) = \frac{1}{q} \int dz \rho''(z) e^{ikz} \quad (\text{Line charge}) \quad ($$

$$F(k) = \frac{2}{kZ} \sin\left(\frac{kZ}{2}\right) \quad (\text{Uniform line charge of length } Z) \quad ($$

Distorted spherical symmetry may be said to occur if the transformation  $z' = pz$  serves to make  $\rho$  spherically symmetric in the prime system. Let  $F_s$  be the form factor calculated by (B2) in the prime frame. It is simple to show that

$$F(k_x, k_y, k_z) = F_s(k_x^0, k_y^0, k_z^0/p) \quad ($$


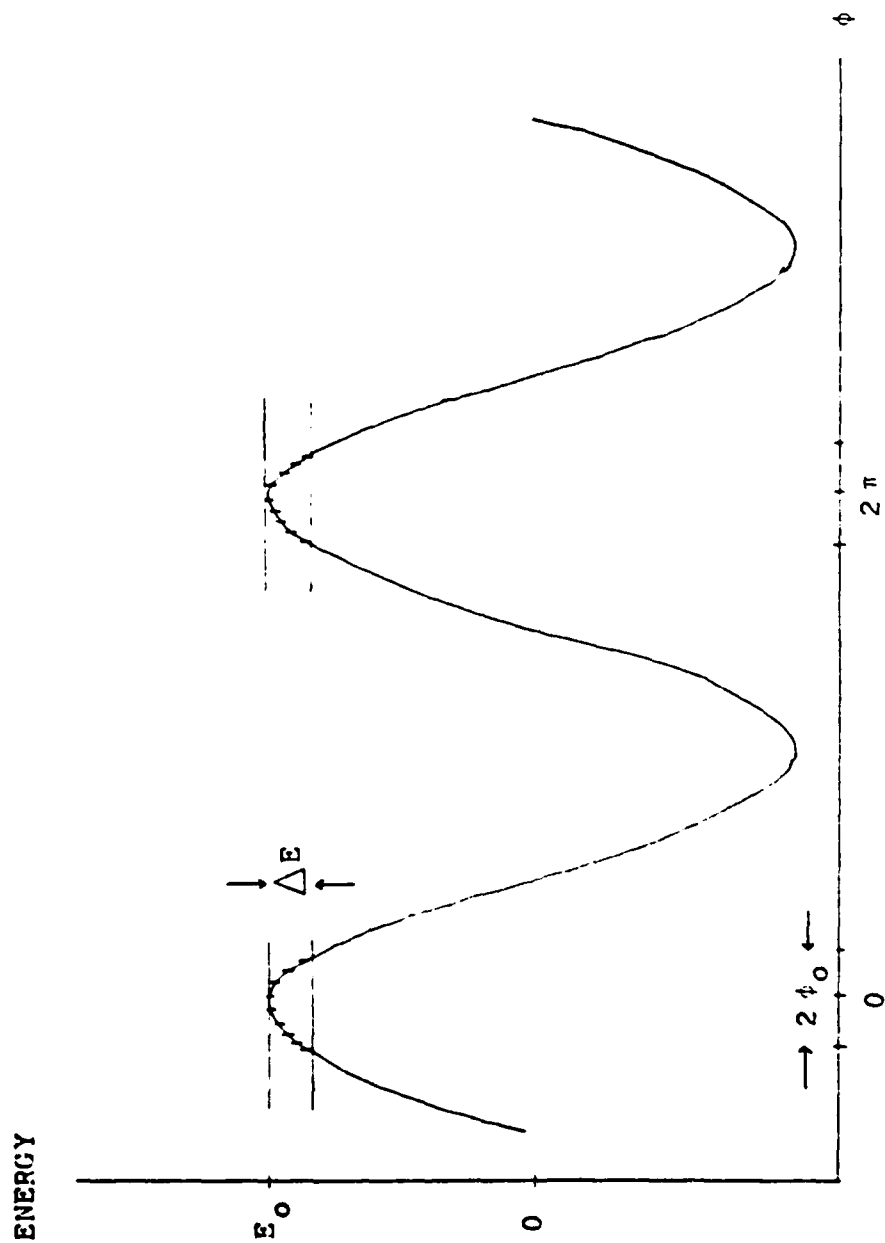



FIGURE 1 STRUCTURE OF CHARGE PULSE FROM A TRAVELING WAVE ACCELERATOR.  $\phi$  is the phase angle of an electron relative to the peak of the wave. Electrons in the range  $\pm \phi_0$  are passed by a magnetic deflection system.



A

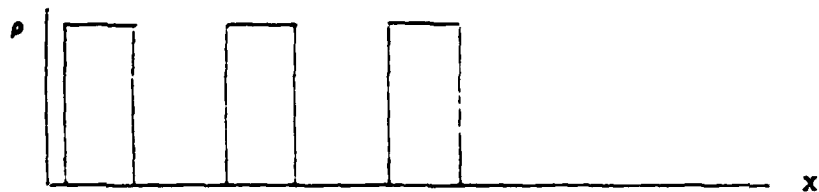


B

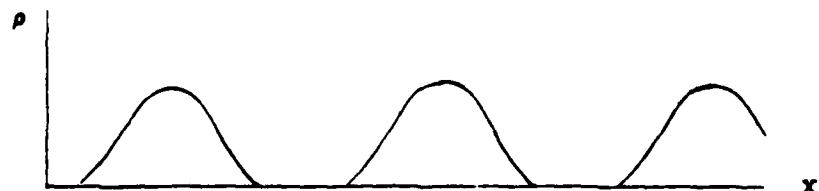

C

FIGURE 2 . POSSIBLE ELECTRON BUNCH STRUCTURES.


- A. Uniform
- B. Cosine
- C. Gaussian

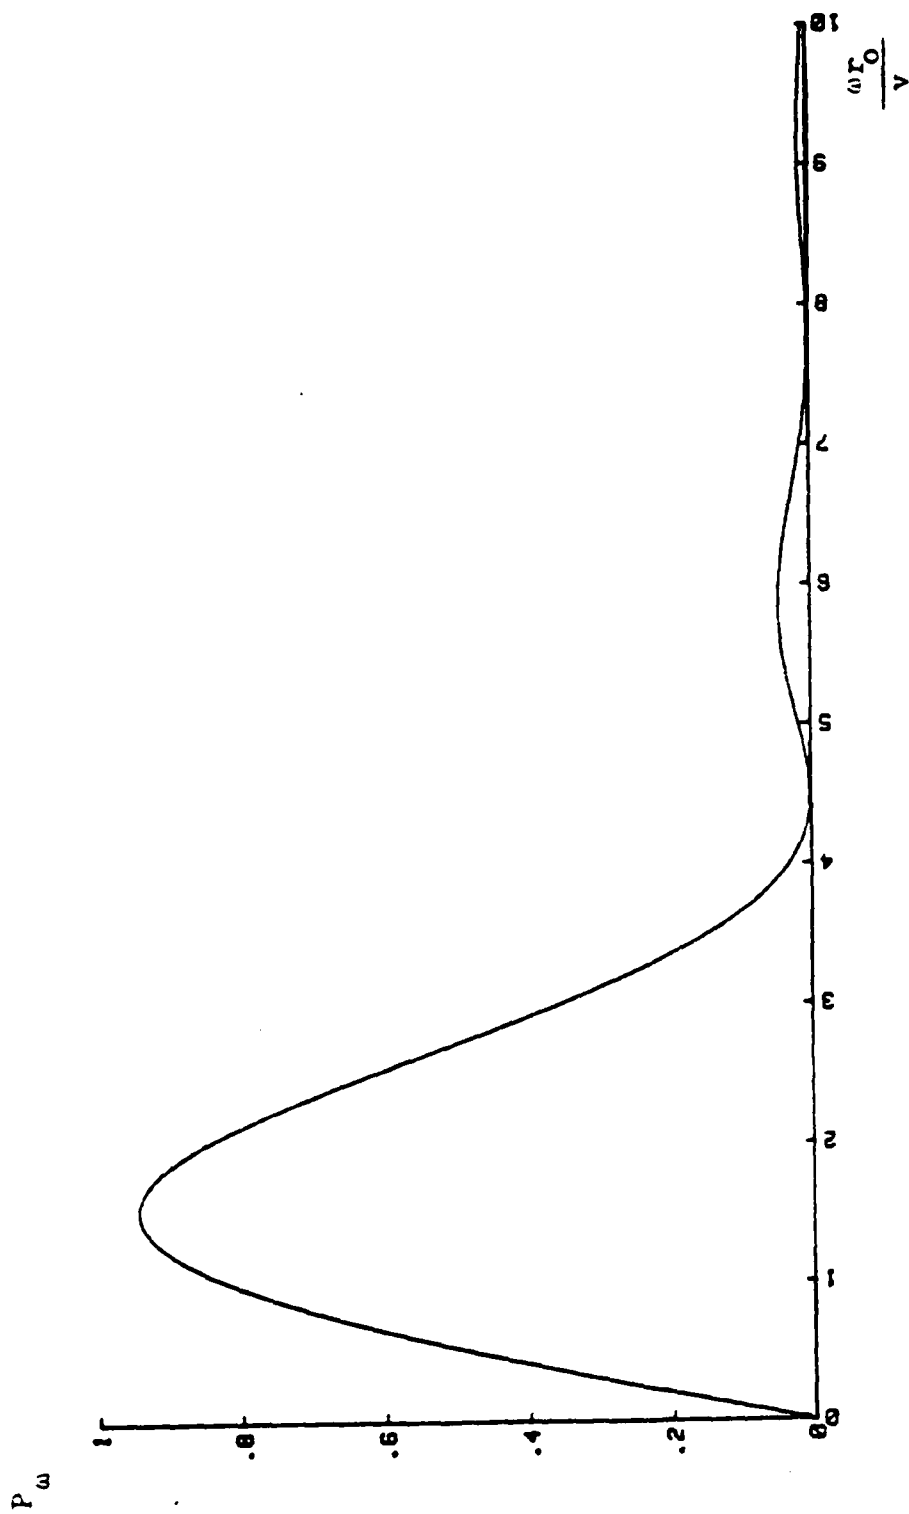

UNIFORM BUNCH RADIATED POWER


FIGURE 3



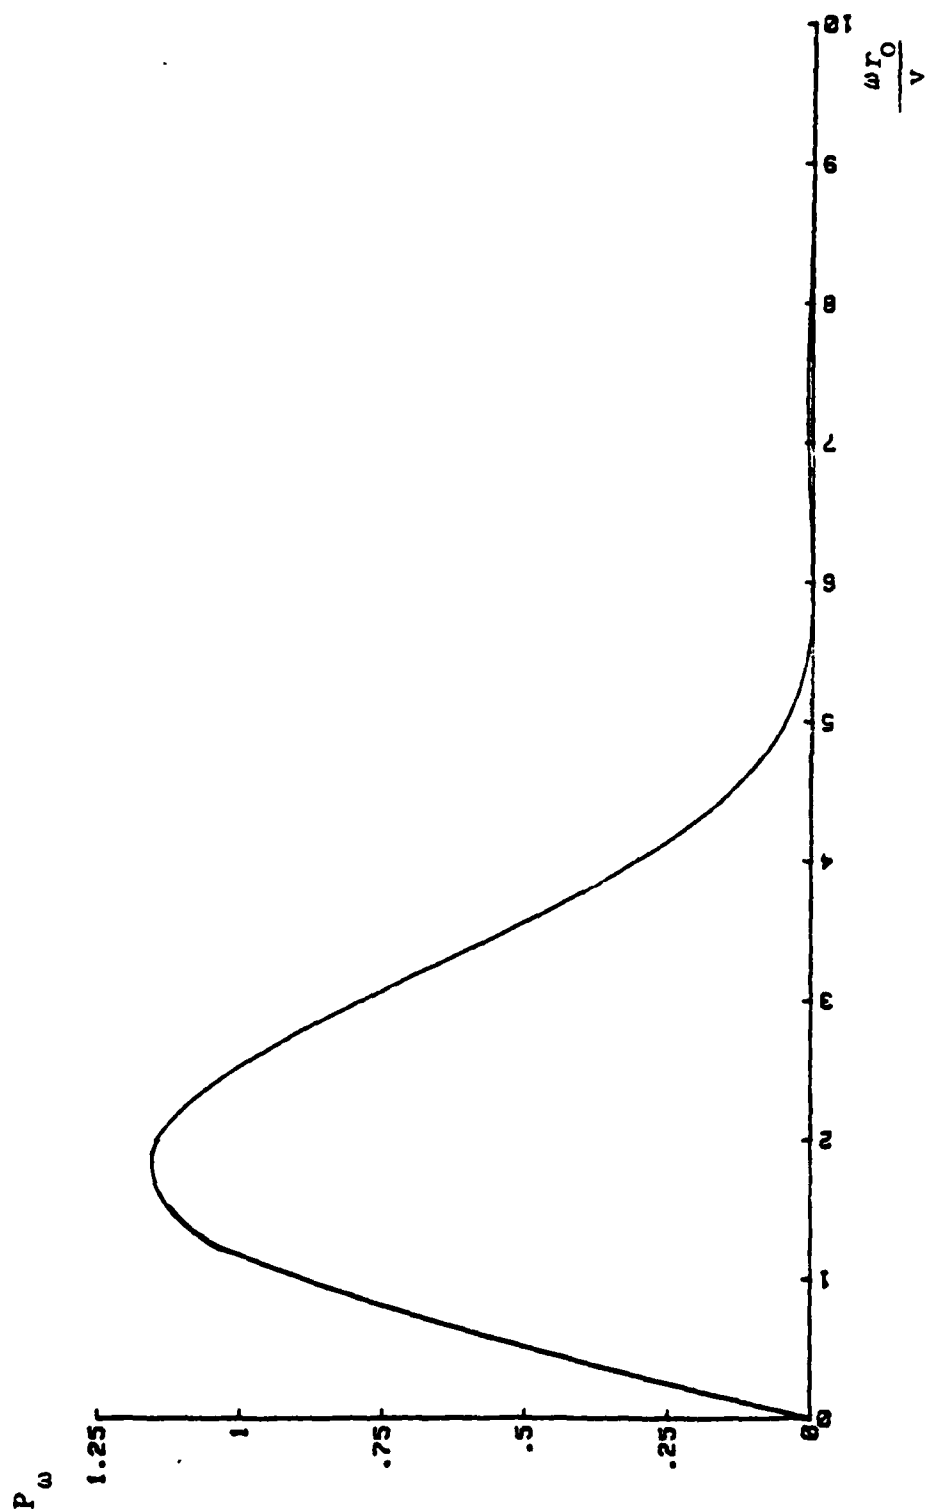


COSINE BUNCH RADIATED POWER

FIGURE 4

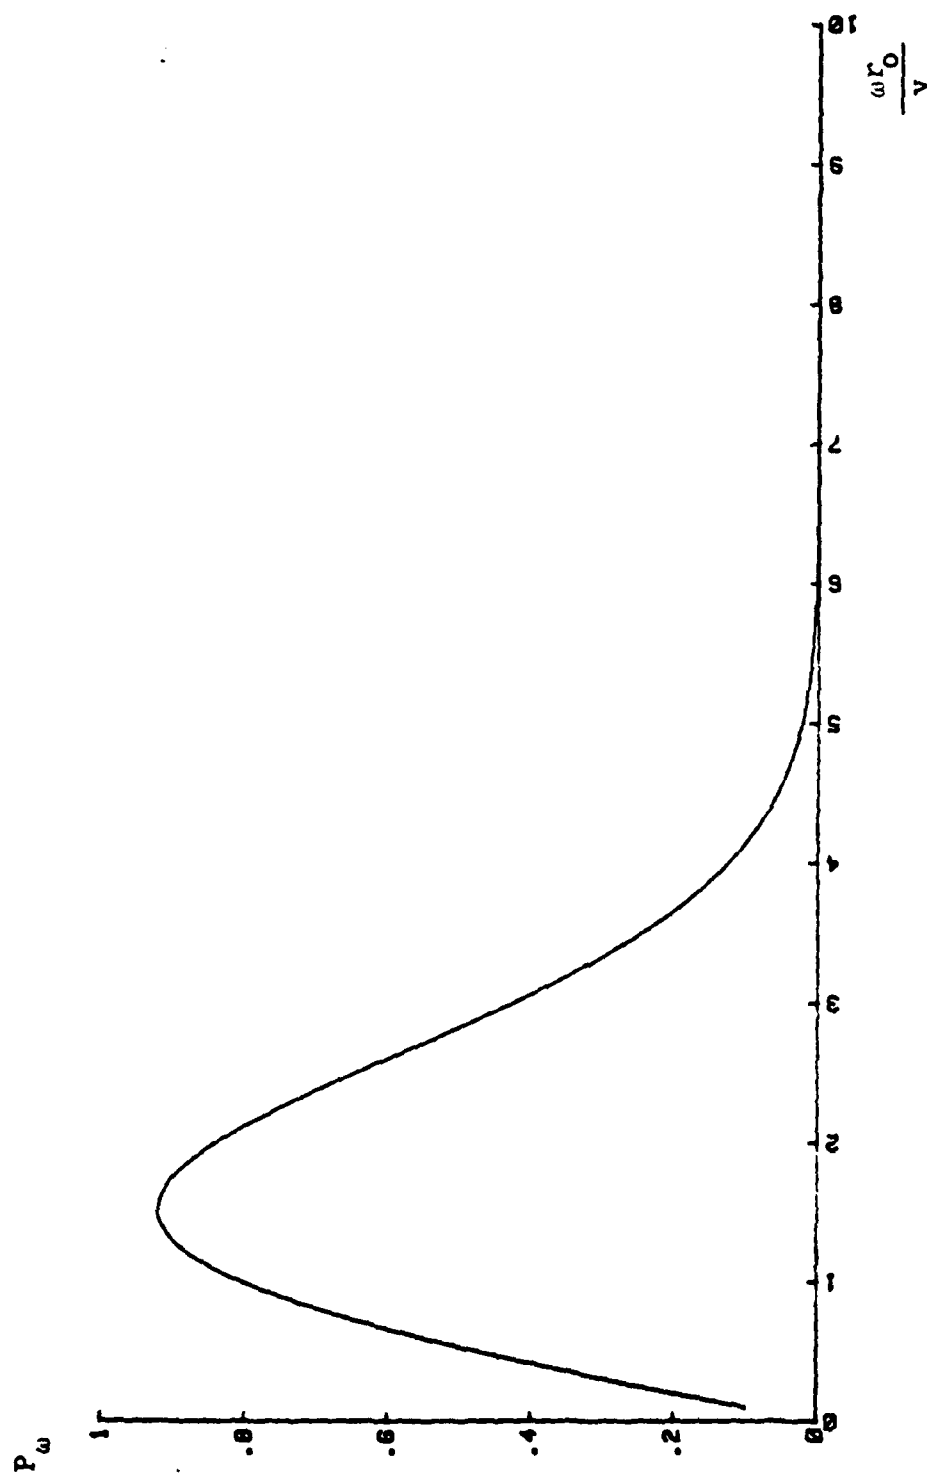

GAUSSIAN BUNCH RADIATED POWER

FIGURE 5

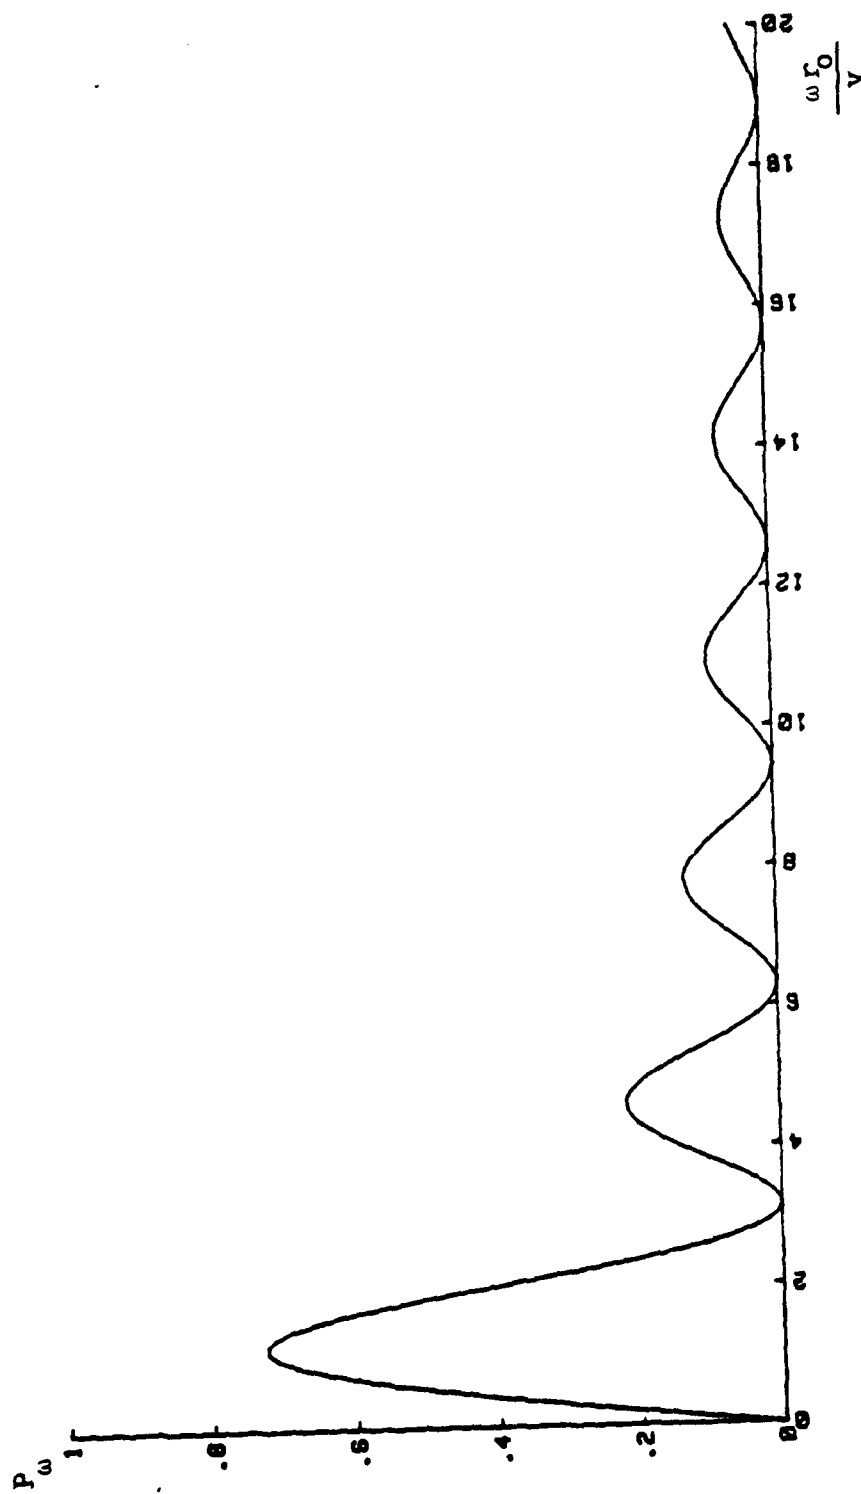

SPHERICAL SHELL BUNCH RADIATED POWER

FIGURE 6

# DISTRIBUTION LIST

Office of Naval Research CDR R. Swafford 800 N. Quincy Street Arlington, VA 22217	1
Office of Naval Research CDR James Offutt 1030 East Green Street Pasadena, CA 91106	1
Library Code 0142 Naval Postgraduate School Monterey, CA 93943	2
Office of Research Administration Code 012A Naval Postgraduate School Monterey, CA 93943	2
F. R. Buskirk & J. R. Neighours Naval Postgraduate School Physics Department, Code 61 Monterey, CA 93943	20
Dr. Thomas Starke M4, M.S. P942 Los Alamos National Laboratory Los Alamos, NM 87545	1
MAJ E. W. Pogue M4, M.S. P942 Los Alamos National Laboratory Los Alamos, NM 87545	1
Dr. Charles Bowman D442 Los Alamos National Laboratory Los Alamos, NM 87545	1
Dr. Thomas Fessenden L-436 Lawrence Livermore National Laboratory Box 809 Livermore, CA 94550	1

Dr. Richard Briggs L-321 Lawrence Livermore National Laboratory Box 808 Livermore, CA 94550	2
Dr. C. M. Huddleston R-401 Naval Surface Weapons Center White Oak Silver Spring, MD 20910	3
CAPT R. L. Topping PMS 405 Strategic Systems Project Office Naval Sea Systems Command Washington, D.C. 20376	1
Dr. David Merritt PMS 405 Strategic Systems Project Office Naval Sea Systems Command Washington, D.C. 20376	1
CDR William Bassett PMS 405 Strategic Systems Project Office Naval Sea Systems Command Washington, D.C. 20376	1
Director, Defense Advanced Research Project Agency ATTN: LCOL Richard A. Gullickson 1400 Wilson Blvd. Arlington, VA 22209	2
Defense Technical Information Center Cameron Station Alexandria, Virginia 22314	2